



1U Horizontal Fan Tray - 6 Way

Manufactured by DPS in the UK. We design, punch, fold, powdercoat, assemble, test and despatch.

2M detachable lead with moulded plug
 Specials made to order
 All steel construction
 Powder coated RAL7044

Standard Options

Low Noise Fan



DC Fans





Thermostat



Speed Control



Fan Fail

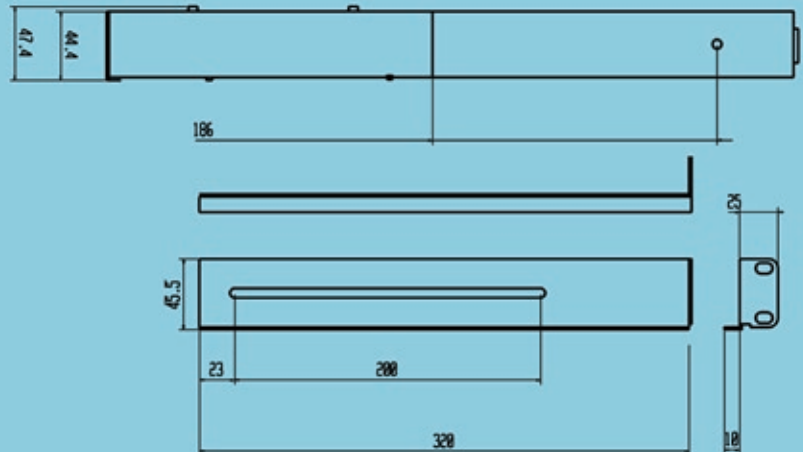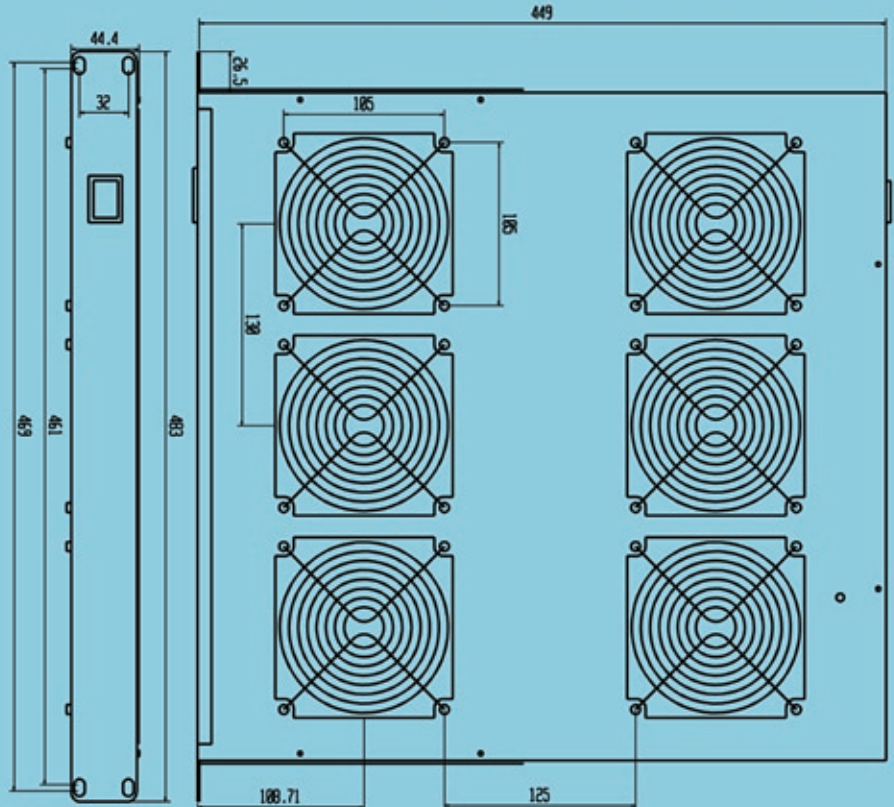

REAR SUPPORT BRACKETS 1XLH 1XRH

FIXING BRACKET CENTERS FROM 583MM TO 746MM

	LOW NOISE		STANDARD FAN	
	Specification	Unit	Specification	Unit
RATED VOLTAGE	230	VAC	230	VAC
FREQUENCY	50 / 60	Hz	50 / 60	Hz
SPEED	1350 / 950	R.P.M.	2400 / 2700	R.P.M.
INPUT CURRENT	0.05 / 0.04	Amp	0.16	Amp
NOMINAL CURRENT	0.10	Amp	0.16	Amp
AIR FLOW	49.1 / 34.7	CFM	90 / 100	CFM
STATIC PRESSURE	1.34 / 0.73	mmHg	0.236 / 0.276	InchH ₂ O
NOISE	28.6 / 23.4	dBA	39 / 42	dBA
LIFE EXPECTANCY	50,000	Hours	50,000	Hours

Data & Power Solutions Ltd.

Unit 1, The Monarch Centre, Venture Way, Priorswood, Taunton, Somerset. UK. TA2 8DE

tel: +44(0)1823 275 100 fax: +44(0)1823 275 002

email: sales@dataandpower.com web: www.dataandpower.com

